

## HD-TriGrip rivets

### Application

- Sheeting and cladding
- Flashings, gutter, facias, soffits
- Thin sheet applications
- Suitable for height safety and access systems

### Key Features



- Provides positive clamping force with no radial pressure or expansion
- Slotted body spreads to form three-pronged bearing surface
- Excellent material clamping across wide grip range
- Neoprene washer provides watertight seal

## Datasheet

Document Reference: [DS-FS-HDTri-7.17/01](#)

# HD-TriGrip rivets

Code	Body diameter (mm) 'a'	Drill size (mm)	Head diameter (mm) 'b'	Rivet length (mm) 'c'	Grip range (mm)
RTG-LF-AA-7.7 x 28	7.7	8.0	19.0	28	1.1 - 9.5

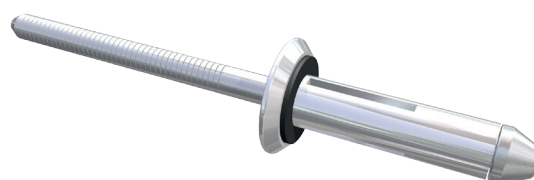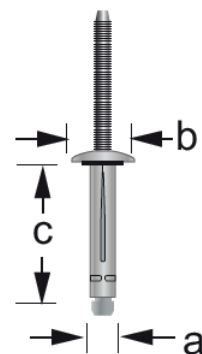

RTG-AA-7.7

**FIXFAST Ltd | Merlin House | Seven Mile Lane | Borough Green | Sevenoaks | Kent | TN15 8QY**  
**T: 0845 450 7483 | F: 0845 450 7486 | E: info@fixfast.com | W: www.fixfast.com**

*Fixfast is a trading name of FIXFAST Ltd which is a company registered in England & Wales with number 09481218.  
 The registered office is Fixfast, Merlin House, Seven Mile Lane, Borough Green, Sevenoaks, Kent, United Kingdom TN15 8QY*

*©Fixfast September 2017. All rights reserved. Due to a policy of continual development, Fixfast reserves the right to change product specification and descriptions without prior notice.*



Certificate Number 10905  
 ISO 9001: 2008  
 ISO 14001: 2004  
 BS OHSAS 18001: 2007