

Maximum reliability. Minimum fuss.

 **FIXFAST**

Technical Data Sheet

Sealed head rivets

Fastener Systems




Application

- + Sheeting & Cladding
- + Facade and rainscreen
- + General construction

Key Features

- + Domed aluminium body with mandrel retained in body after setting
- + Available with carbon or stainless steel mandrel
- + Available in a wide range of RAL and BS colours
- + Available with small rubber sealing washer under flange

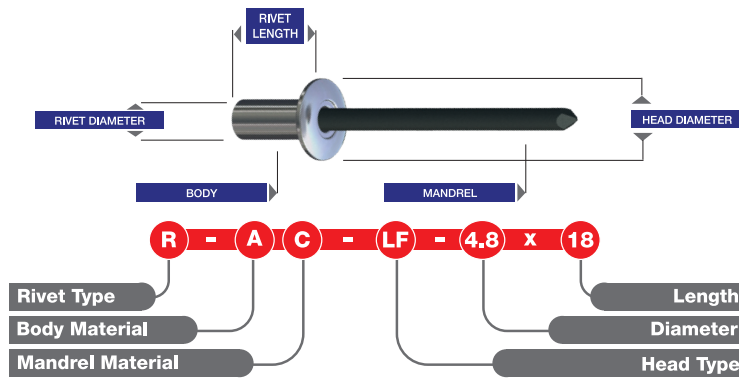

Sealed head aluminium with carbon steel mandrel

Code	Body dia. (mm)	Drill size (mm)	Head dia. (mm)	Rivet length (mm)	Mandrel dia. (mm)	Grip range min-max (mm)
RSH-AC-4.8x11	4.8	4.9	9.5	11.0	2.6	4-6
RSH-AC-4.8x11-W				11.0		3-5
RSH-AC-4.8x14				14.0		7.5-9.5
RSH-AC-4.8x14-W				14.0		6.5-8.5




Sealed head aluminium with stainless steel mandrel

Code	Body dia. (mm)	Drill size (mm)	Head dia. (mm)	Rivet length (mm)	Mandrel dia. (mm)	Grip range min-max (mm)
RSH-AS-4.8x11	4.8	4.9	9.5	11.0	2.6	4-6
RSH-AS-4.8x11-W				11.0		3-5
RSH-AS-4.8x14				14.0		7.5-9.5
RSH-AS-4.8x14-W				14.0		6.5-8.5



Lacquered sealed head

Code	Body dia. (mm)	Drill size (mm)	Head dia. (mm)	Rivet length (mm)	Mandrel dia. (mm)	Grip range min-max (mm)
RSH-AS-LAC-4.8x11	4.8	4.9	9.5	11.0	2.6	4-6
RSH-AS-LAC-4.8x11-W				11.0		3-5
RSH-AS-LAC-4.8x14				14.0		7.5-9.5
RSH-AS-LAC-4.8x14-W				14.0		6.5-8.5





Merlin House
Seven Mile Lane
Borough Green
Sevenoaks
Kent
TN15 8QY

Enquiries

0800 304 7616

International

+44 (0) 1732 882387

Fax

0845 450 7486

Email

info@fixfast.com



Certificate number 10905
ISO 9001, ISO 14001
OHSAS 18001