


Maximum reliability. Minimum fuss.



# Technical Data Sheet

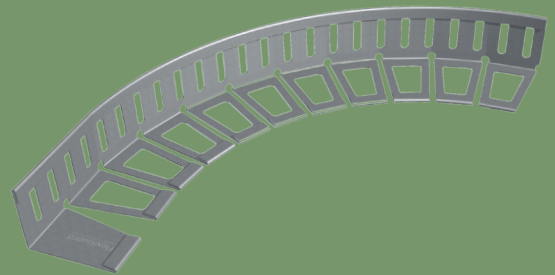

EdgeGuard Flexi

**Living Roof Systems**

## Application

- + Designed for use in variety of green or ballasted roof applications
- + Can be used either as an edge restraint, or where a solution for retaining or separating the roof garden materials is required.


## Key Features

- + Used for creating curves to suit the roof design
- + Supplied in 2.4 M lengths - quick installation
- + Lightweight and robust, can be cut to length
- + Available powder coated in any colour
- + Manufactured from aluminium - long lasting and aesthetically pleasing

## Technical Data

Code	Description	Height (mm)	Width of base (mm)	Material thickness (mm)	Length of section (mm)
EG-F-50/2400	Aluminium, pre-punched and profiled	50	100	1.5	2400
EG-F-75/2400		75	100	1.5	
EG-F-100/2400		100	100	1.5	
EG-F-120/2400		120	100	1.5	
EG-F-150/2400		150	150	1.5	
EG-F-200/2400		200	150	2.0	
EG-F-250/2400		250	200	2.0	
EG-F-300/2400		300	200	2.0	

The minimum radius for installing is 1.8m

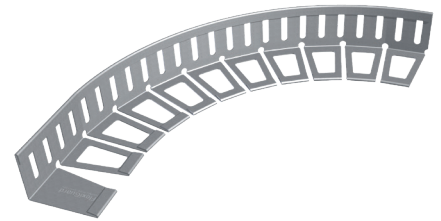

EG-F



Merlin House  
Seven Mile Lane  
Borough Green  
Sevenoaks  
Kent  
TN15 8QY

**Enquiries**

0800 304 7616

**International**

+44 (0) 1732 882387

**Fax**

0845 450 7486

**Email**

info@fixfast.com



Certificate number 10905  
ISO 9001, ISO 14001  
ISO 45001