


Maximum reliability. Minimum fuss.



Technical Data Sheet

SlumpGuard®

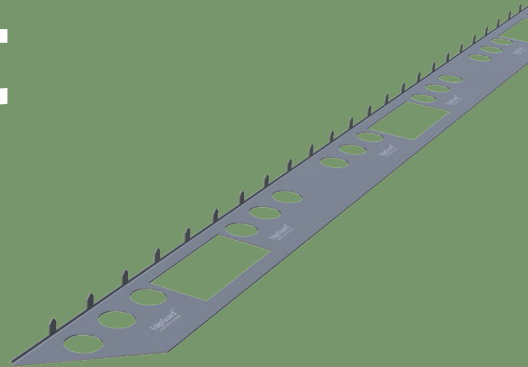

Living Roof Systems

Application


+ Designed to hold green roof material when installed on barrel vaulted or pitched roofs

Key Features

- + 2 designs - spike or square upstand - to restrain green roof material
- + Supplied in 2.4 M lengths - quick installation
- + Lightweight and robust, can be cut to length


Specification

Code	Description	Height (mm)	Width of base (mm)	Length of section (mm)
SG-A-SPIKE-2400	Retaining spikes penetrate underside of sedum blanket to prevent any slippage	20	100	2400

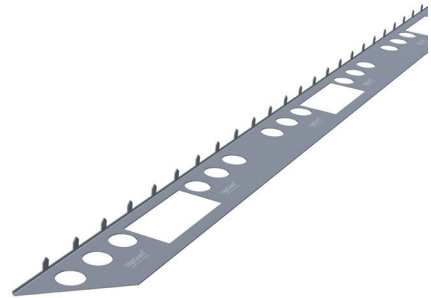

Installation and handling

Code	Description	Height (mm)	Width of base (mm)	Length of section (mm)
SG-A-SQUARE-2400	Square upstands are positioned between sedum modules to prevent sliding	25	100	2400

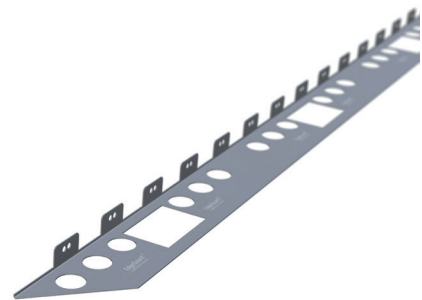



Merlin House
Seven Mile Lane
Borough Green
Sevenoaks
Kent
TN15 8QY

Enquiries
0800 304 7616

International
+44 (0) 1732 882387

Fax
0845 450 7486

Email
info@fixfast.com



Certificate number 10905
ISO 9001, ISO 14001
OHSAS 18001