


Maximum reliability. Minimum fuss.



# Technical Data Sheet

AFT Foil Tape

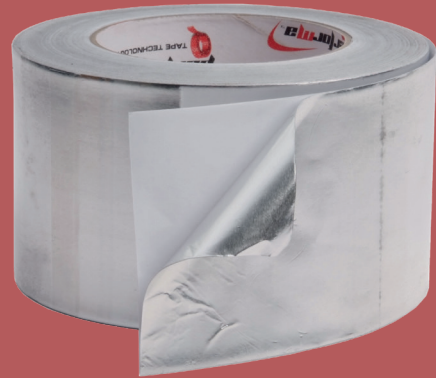

## Sealing Products

### Application

- + Sealing joints on foil faced rigid foam insulation boards

### Key Features

- + Self adhesive, heat reflective 30 micron aluminium foil tape
- + Strong polythene coated release paper
- + Certified to BS476 part 6 + 7 Class "O" Standard

## Substrate compatibility

Steel	Aluminium	GRP / PVC	Fibre cement	Glass (uncoated)	Timber (painted or stained)	Concrete/Brickwork
●	✓	-	✓	●	●	-

✓ = Recommended    ● = Compatible

## Dimensions

Code	roll width (mm)	Roll length (m)	Rolls per Carton	Colour
AFT-50	50	45	24	Silver
AFT-75	75	45	16	Silver
AFT-100	100	45	12	Silver
AFT-150	150	45	8	Silver


## Technical Performance

Description	Units	Value	Test Method
Foil Thickness	mm	0.030	ASTM D3652
Total thickness	mm	0.070	ASTM D3652
Adhesion to steel	N/25mm	12	ASTM D3330
Tack rolling ball	cm	5	ASTM D3121
Tensile strength	N/25mm	45	ASTM D3759
Elongation	%	3	ASTM D3759
Service temp	°C	-30 - +120	-
Application temp	°C	+10 - 40	-

## Declaration of Conformity Information

Class "O" approval

Tested in accordance with BS476: Part6:1989 + A1:2009 and BS476: Part7:1997



AFT



Merlin House  
Seven Mile Lane  
Borough Green  
Sevenoaks  
Kent  
TN15 8QY

**Enquiries**

0845 450 7483

**International**

+44 (0) 1732 882387

**Fax**

0845 450 7486

**Email**

info@fixfast.com



Certificate number 10905  
ISO 9001, ISO 14001  
OHSAS 18001